

65

SERIES

SOCKET
TERMINAL TYPE: **SOLDER**
MOUNTING: **PCB**

SUITABLE FOR





Rolling
stock

OVERVIEW

- PCB-mount
- Sturdy construction
- Excellent contact pressure on relay terminals
- No internal soldering

- No maintenance
- Provision for fitment of keying pins
- Provision for fitment or retaining clip

MODELS

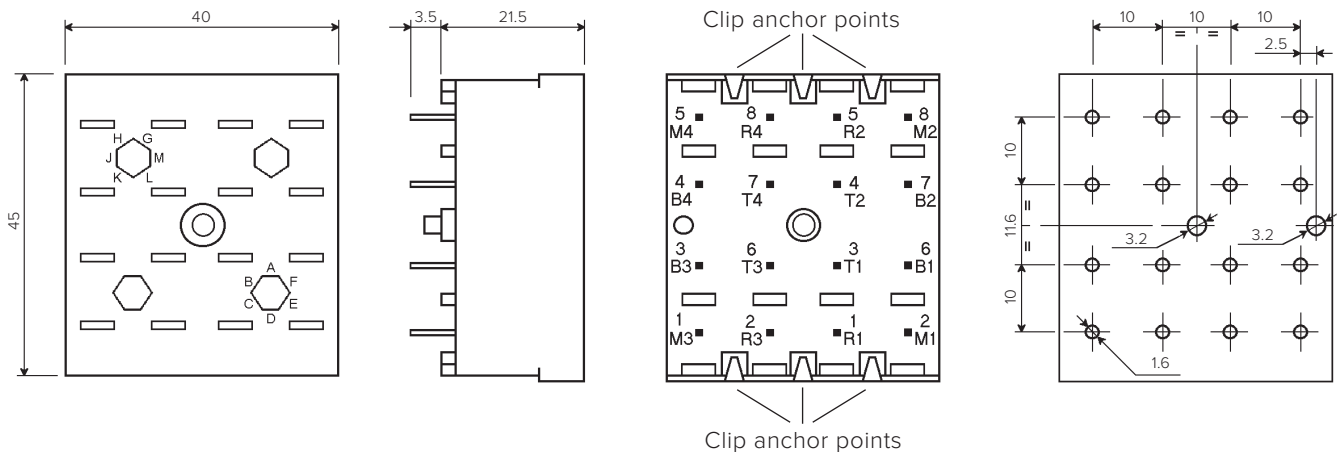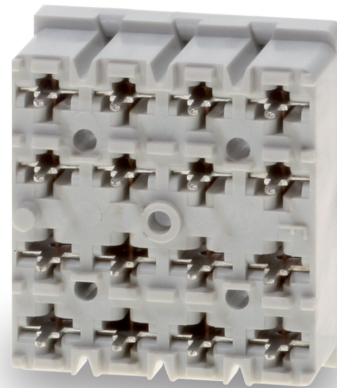

SPECIFICATIONS

Weight: 51 g
Operating temperature: -25°C...+70°C
Storage temperature: -40°C...+85°C
Dielectric strenght: 2.5 kV 50 Hz for 1 min.

Type and size of terminals: solder, \varnothing 1.6 mm
Fire resistance: EN60695-2-1, UL94 - V0, EN45545-2, NFPA130
Standards: EN60255, EN60947, EN61810, EN61373