

# PAVx

FOR C, D & G RELAYS  
SERIES MODELS

CONNECTION: **FRONT**  
TERMINAL TYPE: **SCREW**  
MOUNTING: **PANEL / DIN RAIL**

## OVERVIEW

- Cable secured with screws
- Mounting to panel and 35 mm DIN rail
- Sturdy construction
- No internal soldering
- Provision for fitment of keying pins
- Provision for fitment or retaining clip
- Snap-in relay (PAVC, PAVD models)
- Protection IP20

## MODELS





PAVC081



PAVD161



PAVG161

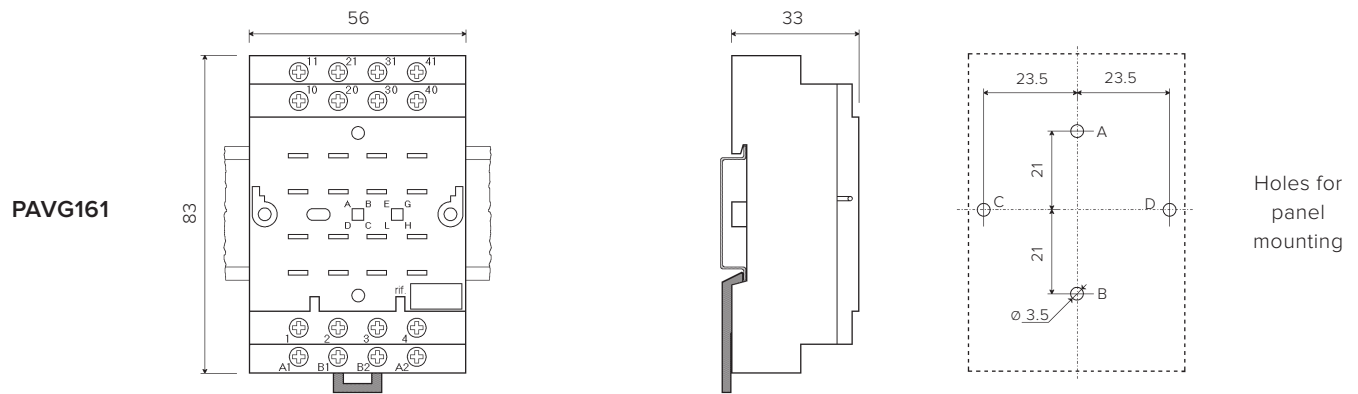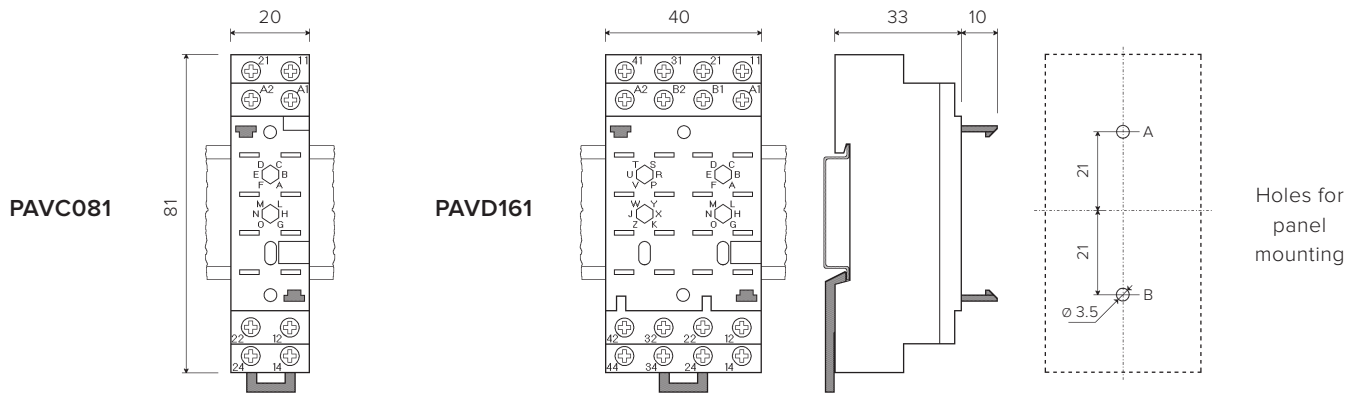

## SPECIFICATIONS

**Weight:** 51 / 100 / 117 g

**Operating temperature:** -25°C...+55°C

**Storage temperature:** -40°C...+70°C

**Panel mounting:**

- $\varnothing$  holes: 5.5 mm

**Mounting to Omega support:** H35 to DIN 46277/3  
EN 60715 standards

**Degree of protection:** IP20

**Dielectric strength:** 2.5 kV 50 Hz for 1 min

**Type and size of screw:** M3 thread, cross head

**Tightening torque:** 0.5...0.8 Nm

**Width of slot:** 7.1 mm / 7.3 mm for PAVG161 model

**Maximum section of cable:** 2 x 2.5 mm<sup>2</sup>

**Fire resistance:** EN60695-2-1, UL94 - V0

**Standards:** EN60255, EN61810