

For relays of series: **C, D, G**
 Connection: **FRONT**
 Terminal type: **SCREW**
 Mounting: **PANEL / DIN RAIL**

PAVC081
 PAVD161
 PAVG161

OVERVIEW

- Cable secured with screws
- Mounting to panel and 35mm DIN rail
- Sturdy construction
- No internal soldering
- Provision for fitment of keying pins
- Provision for fitment of retaining clip
- Snap-in relay (PAVC, PAVD)
- Protection IP20




PAVC081



PAVD161



PAVG161

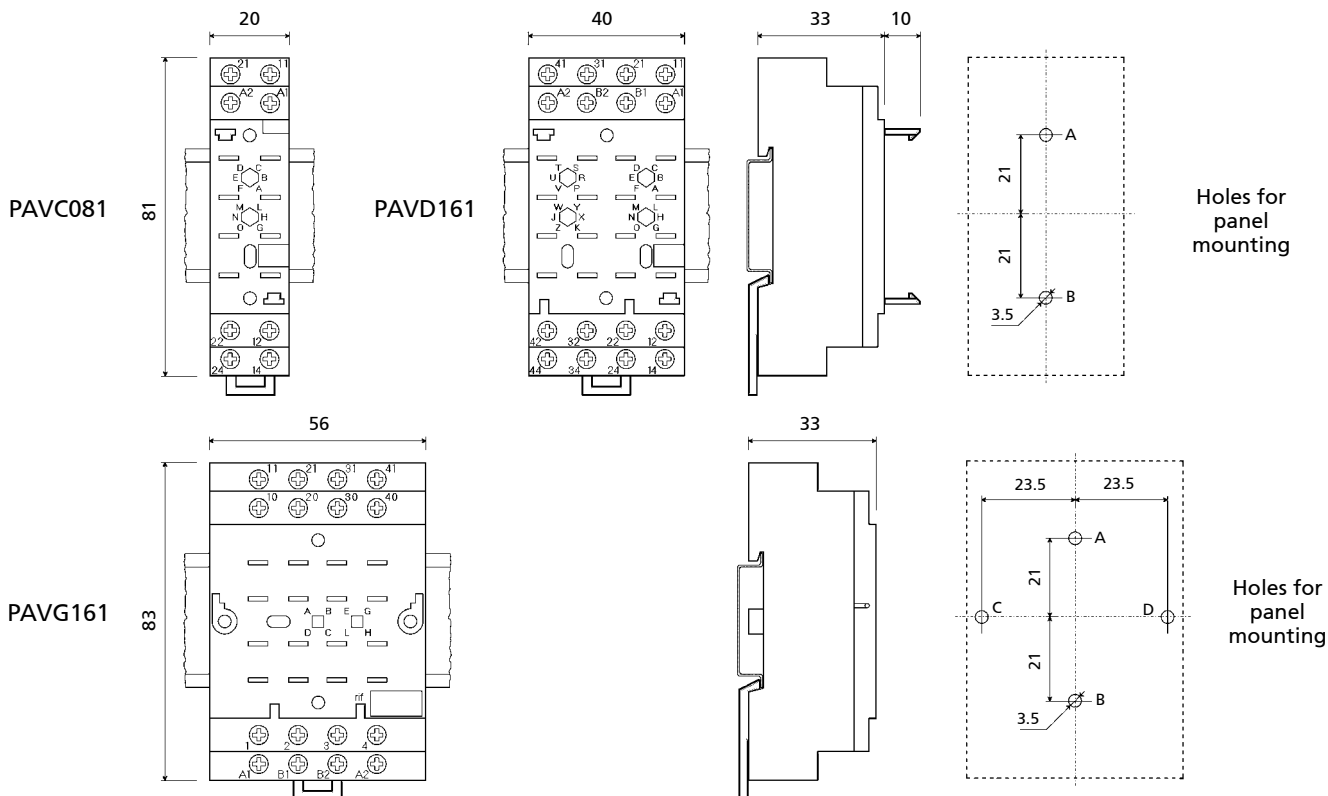

Specifications

Weight: 51 / 100 / 117 g

Operating temperature: -25°C...+55°C

Storage temperature: -40°C...+70°C

Panel mounting:

- ϕ holes: 5.5mm

Mounting to Omega support: H35 to DIN 46277/3 - EN 60715 standards

Degree of protection: IP20

Dielectric strength: 2.5kV 50Hz 1min.

Type and size of screw: M3 thread, cross head

Tightening torque: 0.5...0.8 Nm

Width of slot: 7.1mm / 7.3 for PAVG161

Maximum section of cable: 2 x 2.5 mm²

Fire resistance: EN60695-2-1, UL94 - V0

Standards: EN60255, EN 61810