

OVERVIEW

- Cable secured with screws
- Panel mounting
- Sturdy construction
- No internal soldering
- Relay fastened with securing screws
- Provision for fitment of keying pins
- Protection IP10



PRVM321


Detail of connections




PRVM481



PRVM801

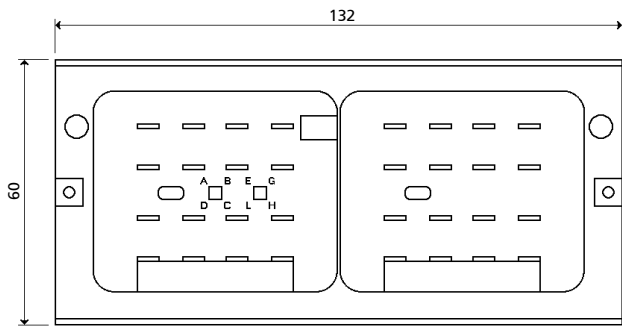


PRVM321

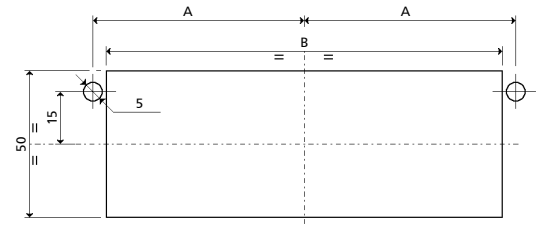


Drilling template

Model	A	B
PAVM321	61	110
PAVM481	89	166
PAVM801	145	278

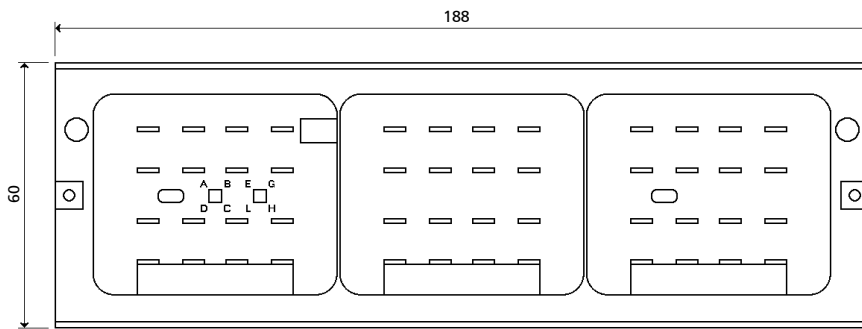


PRVM481




Side view

PRVM321
PRVM481
PRVM801

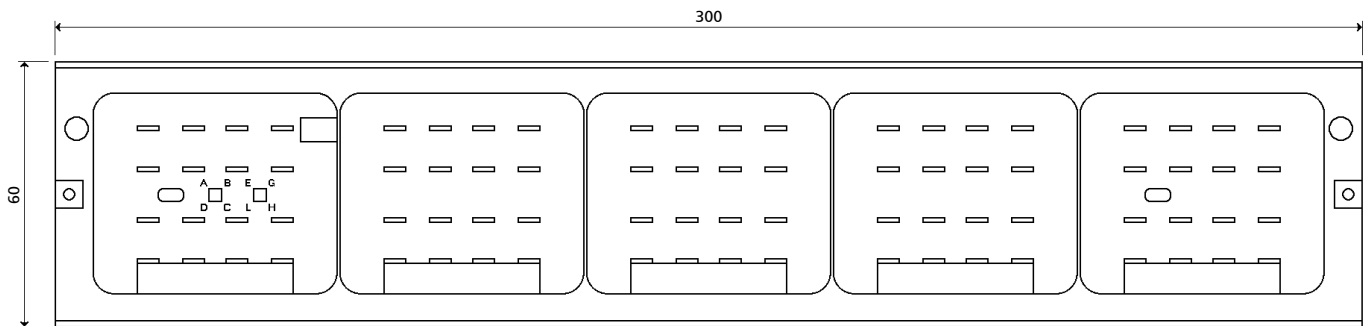

PRVM801

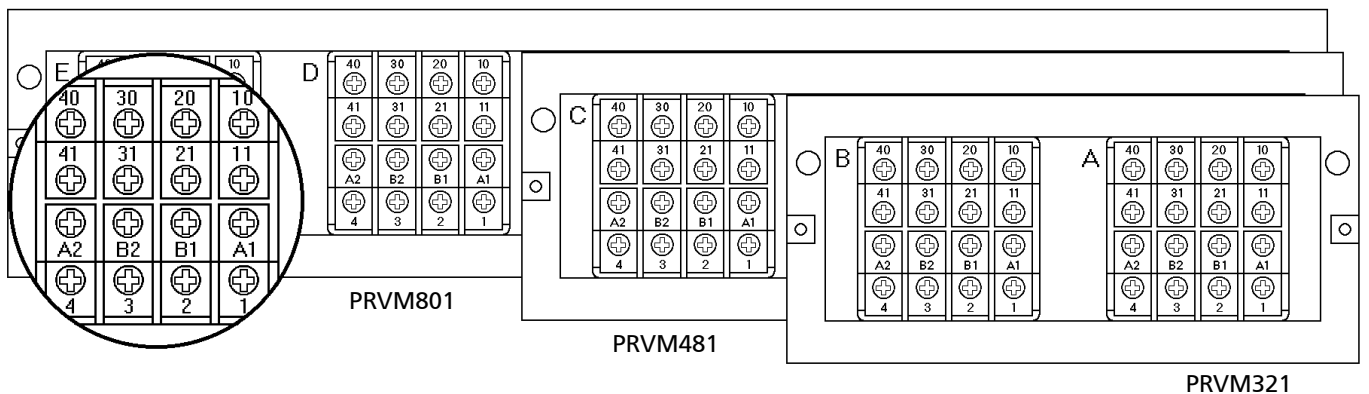

Specifications

Weight: 220 / 350 / 520 g
 Operating temperature: -25°C...+55°C
 Storage temperature: -40°C...+70°C
 Panel mounting:
 • \varnothing holes: 5mm
 Degree of protection: IP10
 Dielectric strength: 2.5kV 50Hz 1min

Type and size of screw: M3 thread, cross head
 Tightening torque: 0.5...0.8 Nm
 Width of slot: 7mm
 Maximum section of cable: 2 x 2.5 mm²
 Fire resistance: EN60695-2-1, UL94 - V0
 Standards: EN60255, EN 61810