

OVERVIEW

- Connection of cable with faston clip
- Panel mounting
- 2 inputs for each relay terminal
- Sturdy construction
- No internal soldering
- Relay fastened with securing screws
- Provision for fitment of keying pins
- Protection IP10



PRDM321




Detail of connections




PRDM481



PRDM801

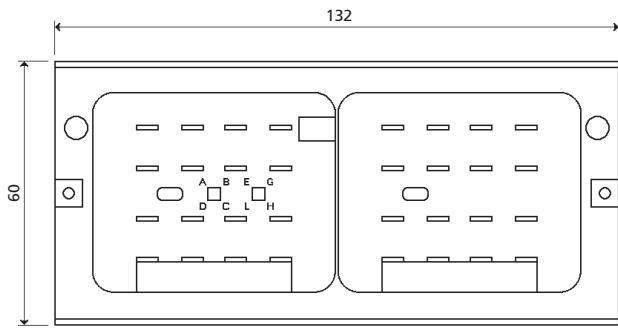


PRDM321

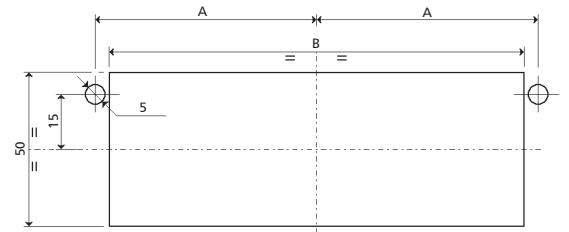


Drilling template

Model	A	B
PRDM321	61	110
PRDM481	89	166
PRDM801	145	278

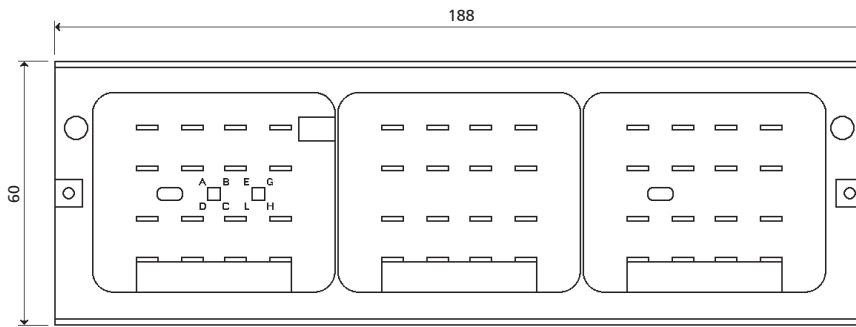


PRDM481




Side view

PRDM321
PRDM481
PRDM801

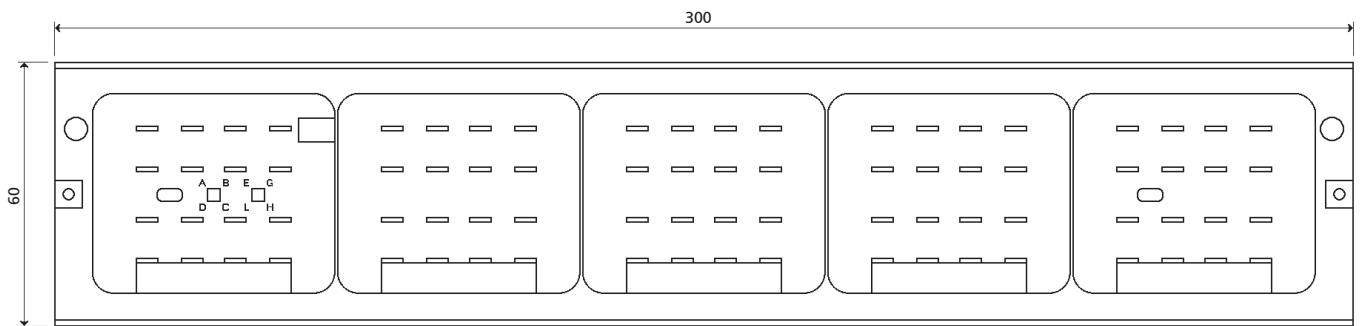

PRDM801

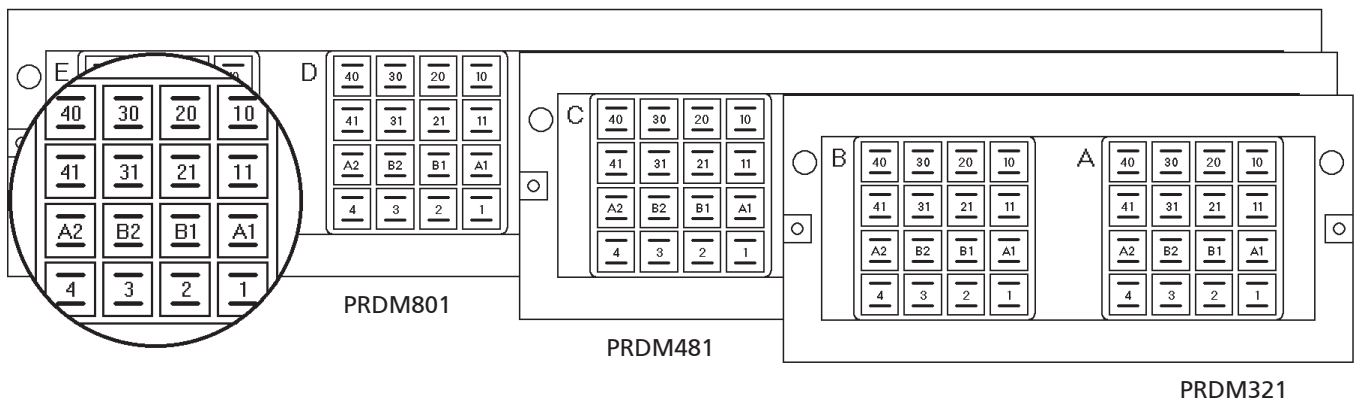

Specifications

Weight: 220 / 350 / 520 g
Operating temperature: -25°C...+55°C
Storage temperature: -40°C...+70°C
Panel mounting:
 • \varnothing holes: 5mm
Degree of protection: IP10
Dielectric strength: 2.5kV 50Hz 1min

Type and size of faston: 2 x 4,8x0,8
Width of slot: 7,8mm
Maximum section of cable: 2 x 2.5 mm²
Fire resistance: EN60695-2-1, UL94 - V0
Standards: EN60255, EN 61810